




BJT TERMINAL BLOCKS TYPE 3241

- Moulded monoblock rail for industrial applications.
- Connections with pre-insulated lugs to be crimped on cables.
- Steel rods to insure a high tightening torque.
- Available in M4 - M6 and M10, for 2 to 12 terminals.
- With lock nuts and flat washers.

SECTION 9°

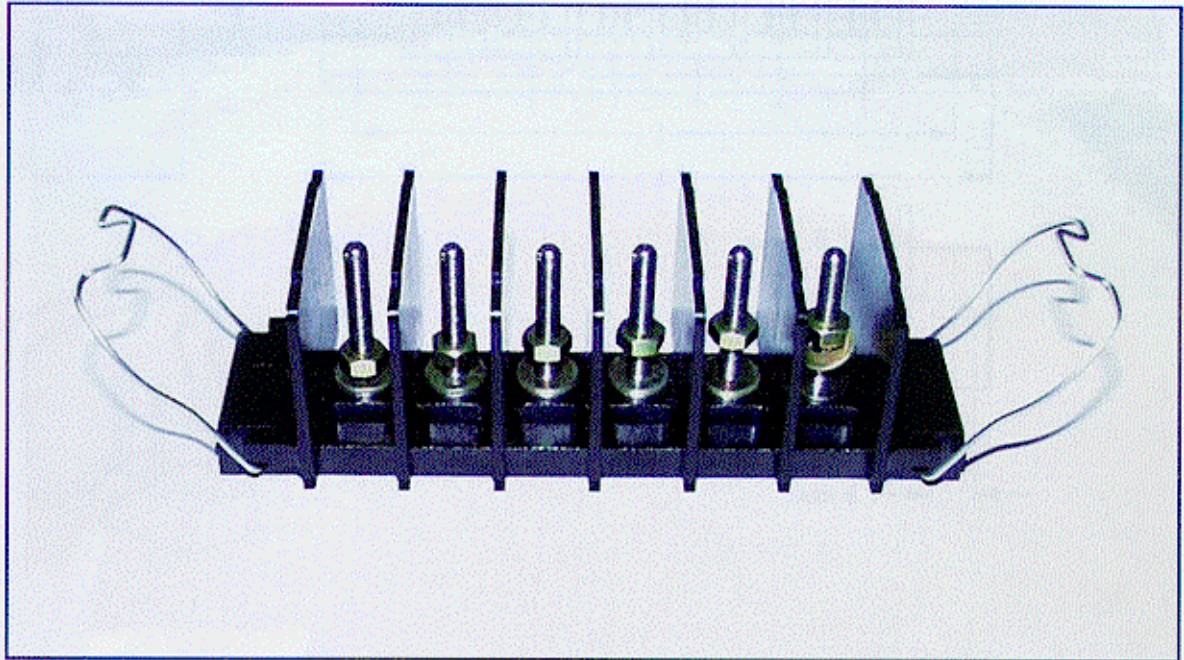

TECHNICAL DATA

ELECTRICAL

Sections	:	M4 Terminal	6 mm ² to 10 mm ²
		M6 Terminal	16 mm ² to 35 mm ²
		M10 Terminal	120 mm ²
Current	:	M4 Terminal	40 A
		M6 Terminal	71 A
		M10 Terminal	250 A
Running current	:	600 VCA	
Insulation resistance	:	5.10 ⁹ MΩ	
Dielectric withstanding voltage	:	> 5 KV	

MECHANICAL

Insultation	:	Thermoplastic Requirement 3 NF F 16 102 and NF F 16 103
Rods-Terminals	:	Zinc, bichromate plated
Nystop nut	:	Zinc, bichromate plated
Flat washer	:	Zinc, bichromate plated

CLIMATIC

Operating temperature	:	-55°C +125°C
-----------------------	---	--------------



295 Kesmark
Dollard-des-Ormeaux,
Quebec, Canada H9B 3J1
Tel.: (514) 421-2153
Fax: (514) 421-3408
www.air-lb.ca