
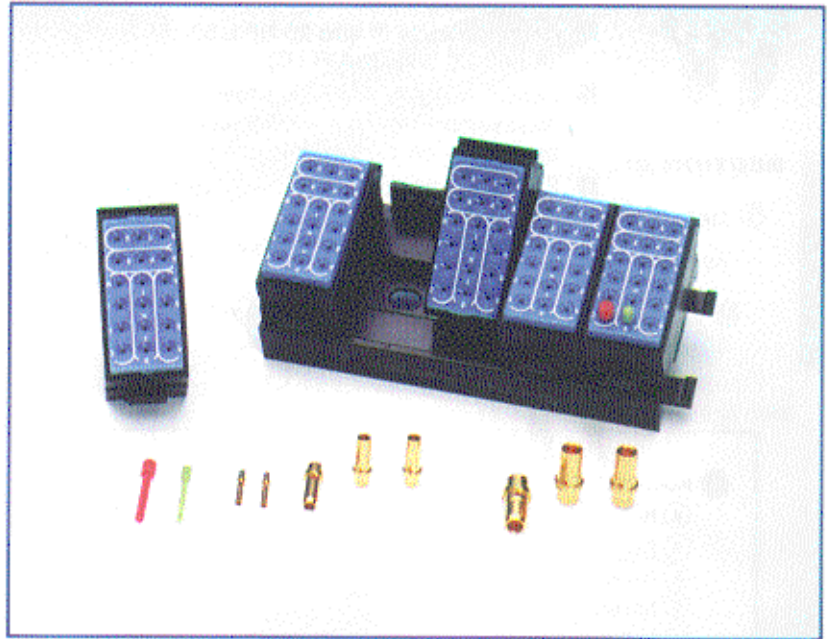


FEEDBACK MODULES suitable for Contact Size 20 (For sizes 16 and 12, consult AIR LB)

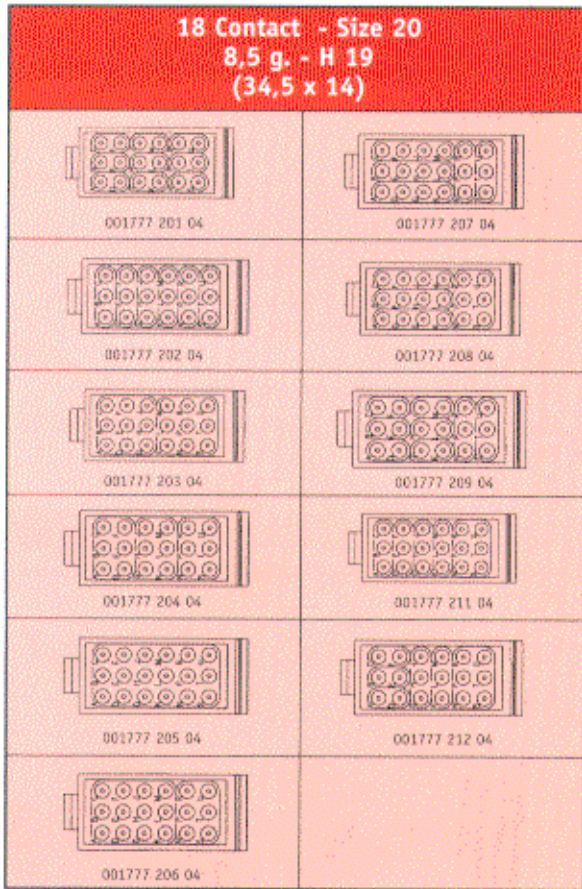

	SIZE 20 GOLD	SIZE 20 NICKEL
CRIMP CONTACTS ®	001104 200 92	001104 300 94
INSERTION / EXTRACTION TOOLS*	001104 200 25	
SEALING PLUG	001109 200 30	
TESTING TOOL	001111 200 02	

*Metallic tools are also available (contact connection colours)

TECHNICAL DATA

In conformity with requirement 2 of NF F 16 102 and UL 94 Vo Standards

MECHANICAL

Module	Material	:	Copper alloy
Grommet	Material	:	Blue fluorinated elastomer
Contact	Material	:	Copper alloy
	Protection	:	Gold plated or nickel plated
Contact retention		:	Size 20 : 8,9daN

MECHANICAL ENDURANCE

500 locking and unlocking cycles

CLIMATIC

Operating temperature	:	-55°C +150°C
-----------------------	---	--------------

SINUSOIDAL VIBRATIONS

Frequency	:	from 10 to 2 000 Hz
Acceleration	:	20 g

SHOCKS

: 100 g 1/2 sinus, 6 ms
 (3 shocks in 3 directions)

SEAL

: IP 66 with appropriate cable ø

ELECTRICAL

Size	Section mm	AWG	Current rating
20	0,21 - 1	18-20-22-24	10 A

DIELECTRIC WITHSTANDING VOLTAGE:

1 500 Vrms