




QUICK CONNECTING ACCESSORIES

- Circular grounding modules
- In-line junction modules
- Terminals

CIRCULAR GROUNDING MODULES - Ⓢ CONTACTS and Ⓟ CONTACTS


SECTION 1*

Modules with female Ⓢ shunts

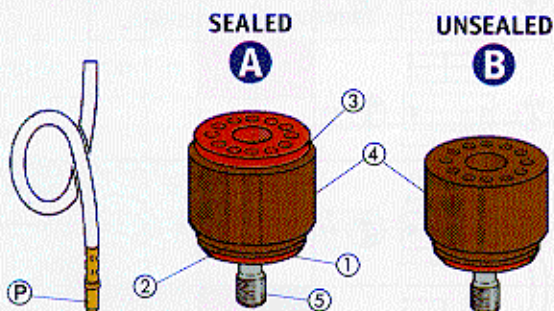



Modules with male Ⓟ shunts

OLD GENERATION (AG) NEW GENERATION (NG)

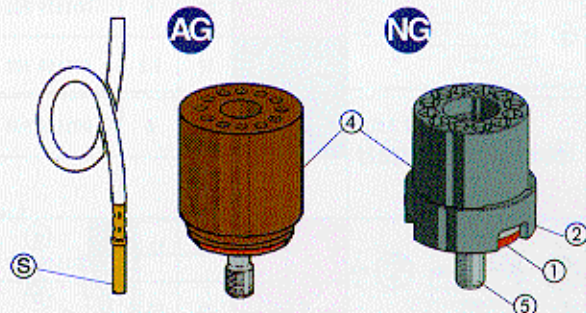

- Made up of 12 male contacts Ⓟ or female contacts Ⓢ, inserted in an insulating shell (4) mounted on a metallic plate (2) with a captive mounting screw (5).
- Wired with standardized tools.
- Module with female shunt Ⓢ for male contacts Ⓟ size 20, AWG gauge 18 to 24 in conformity with UTE/NF L 53-105 NAS 1749 and EN 3155-016 Standards.

- Modules with male shunts Ⓟ for female contacts Ⓢ size 20, AWG gauge 18 to 24 in conformity with MIL-C39029/368, (ASNE 0425-A-2001).
- Sealing of the modules (A) is assured by a patented overmoulded grommet (3) - unsealed without grommet for (B) (AG) (NG).
- A fluorinated silicone rubber o-ring (1) assures the module to structure sealing.

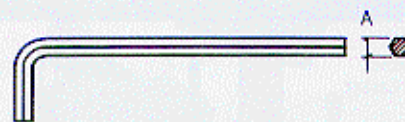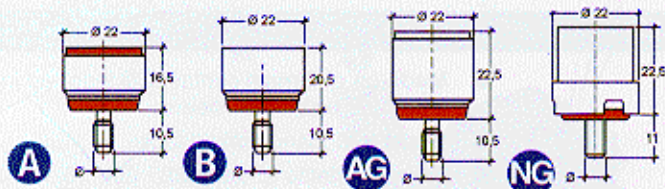

Ref.	MODULES			CONTACTS			TOOLS	
	References	Ø	Weight	Size	Type	References	References	A
A	001174 240 00	M5	15 g.	20	P	001104 200 02	002014 000 61	4 mm
	001174 230 00	1900-32 UNF 2A					002015 000 61	5/32 inches
B	001174 260 00	M5	17.2 g.	20	P	001104 200 02	002014 000 61	4 mm
	001174 250 00	1900-32 UNF 2A					002015 000 61	5/32 inches
AG	001174 200 00	1900-32 UNF 2A	17.5 g.	20	S	001704 201 02 001704 202 02	002015 000 61	5/32 inches -
AG	001174 200 00 A	1900-32 UNF 2A	11 g.	20	S	001704 201 02 001704 202 02	002015 000 61	5/32 inches -

TECHNICAL DATA

MECHANICAL

Module	Material	:	Thermoplastic
Grommet	Material	:	Fluorinated elastomer
Shunt	Material	:	Copper alloy
	Protection	:	Gold on nickel
Contact retention		:	Size 20 : 6,7 daN

CLIMATIC

Operating temperature	:	-55°C +175°C
-----------------------	---	--------------

ELECTRICAL

Current-carrying capacity : 7,5 A per contact point

Size	Section mm ²	AWG	Current
20	0,21-0,93	18-20	2 000 V
		22-24	50/60 Hz



295 Kesmark
Dollard-des-Ormeaux,
Quebec, Canada H9B 3J1
Tel.: (514) 421-2153
Fax: (514) 421-3408
www.air-lb.ca